

Assembly Instructions

Power/Data Conversion Kit

Part Number: 5500-3-100-01



Information Support Concepts
2384 Highway 287 N.
Suite 208
Mansfield, TX 76063-9207

800-458-6255 U.S. Only
Fax (817) 842-9099
Local (817) 842-9090

www.serverrackoptions.com

What's included:




QTY 1: Voice/Data Adapter Kit



QTY 1: Power/Data Center


Step 1:

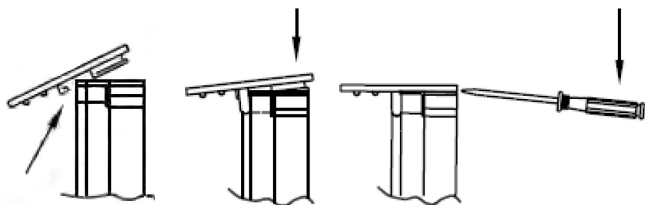

Place hook on the bottom of the cap under the front edge of the power center and slide toward rear.

Tap down on the top of the cap to lock in place on the power center. To remove the cap, pry up on the back edge of the cap.

Step 2:

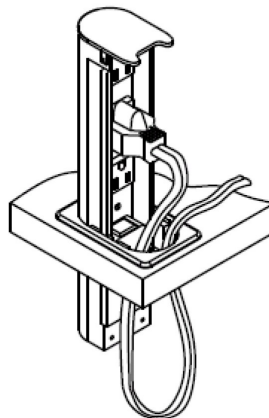

Slide the power/data center through the grommet. Be sure the power supply/communication cable is free to move and down with the power center.


To remove the power/data center: Slide the power/data center to its upright position. Then squeeze the sides of the power center close to the grommet and lift the power center out of the grommet.

Step 3:

Select appropriate adapter plate to fit with your preferred connectors.

Adapter	Manufacturer
AA	Systemax/Commscope
AA	Uniprise/Commscope
BB	L-Com Keystone Modular
BB	Tyco SL, and 110 Connect Series Modular Jacks
BB	Siemon Keystone Style
BB	Allen Tel Versa Tap Series
BB	Leviton Quick Port® Series
BB	Nordx Keystone Style
CC	Tyco SL Coupler Series
CC	Krone 6000 Series/ADC
CC	Hubbell Xcelerator™ Keystone Series
DD	Blank (no coupler/jack)
EE	Ortronics TracJack Series
FF	Panduit Mini-Com Series
GG	Microphone Jack/3-pin XLR, solder type only
HH	Video Monitor Jack/DB-15, panel mount solder style

Step 4:

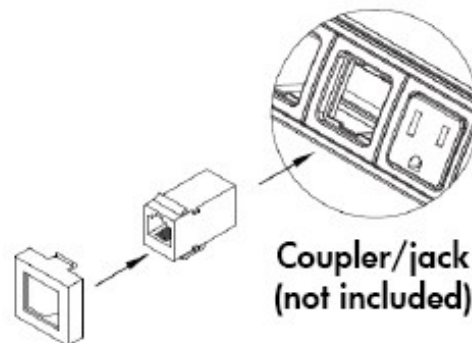

Snap jack into adapter following the instructions provided with the jack.

Once assembled, snap adapter into the notched, square holes in the image shown above.