



*Quality Products. Service Excellence.*

## Adjustable Depth Hinged Wall Rack *APB Series*

Rugged 100 lbs (45 kg) Weight Capacity

### Features:

- Available in 4U, 6U, 8U and 12U mounting heights.
- Hinged for easy rear access.
- Adjusts in depth from 12" to 18" with ease so there is no need to disassemble the whole rack to adjust the depth.
- Rear cable access with multiple tie points for cable management.
- Knockdown design ships unassembled for easy handling reduced freight cost and shipping protection.



### Specifications

- Constructed in 14-gauge steel.
- Tapped 10-32 19" mounting rails are constructed in 14-gauge steel and include rack unit indicators.
  - **SCREW1032-25**, 25-pack of 10-32 mounting hardware included.
- Load rated for up to 100 lbs (45 kg).
  - Swing weight is rated for 1.5 lbs (0.68 kg) per rack unit, evenly distributed.
- Finished in RAL9005 black powder paint.
- TAA compliant for GSA Schedule purchases.
- RoHS Compliant.
- Manufactured in North America within an ISO 9001:2015 certified facility.




### Gallery



### Accessories

- Cable Managers
- Universal Rack Shelf
- Hook and Loop Roll
- Mounting Hardware
- Rack Panels
- Two Post Mounting Keyboard & Equipment Shelf
- 10-32 Mounting Hardware
- PDUs and Outlet Strips

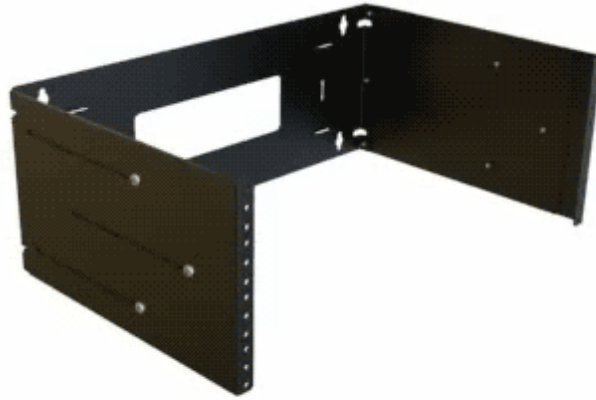

Part No.	Overall Dimensions		Rack	Mounting Dimensions			
	Height	Width	Units	Height	Width	Min Depth	Max Depth
APB19007BK1	6.98	19.25	4U	7.00	19.00	12.00	18.00
APB19010BK1	10.48	19.25	6U	10.50	19.00	12.00	18.00
APB19014BK1	13.98	19.25	8U	14.00	19.00	12.00	18.00
APB19021BK1	20.98	19.25	12U	21.00	19.00	12.00	18.00

**What's in the Box**

Qty Included	Description	Replacement Part No.
1	Rear wall-mounting hinged section	
1	Rear non-hinged section	
2	Sliding Rails	
1	Assembly Instructions	
25	10-32 x 0.75in Rack Mounting Screws	<b>SCREW1032-25</b>
10	10-32 x 3/8 Assembly hardware	

Tags: **Hinged Panel Mount, Adjustable Panel Bracket, knock-down, knock down**

*Data subject to change without notice*

© 2022. Hammond Manufacturing Ltd. All rights reserved.