



CUSTOMER: P/N: 2500.012AL REV. APPROVED BY:

REVISIONS		
REV.	DESCRIPTION	DATE
⚠		2016/06/01
⚠		2018/04/19
⚠		2020/03/31
⚠	Add NOM safety regulations at the head and tail, add online labels, add remark 2 The tail is changed to WS-002A-4A	2021/07/01

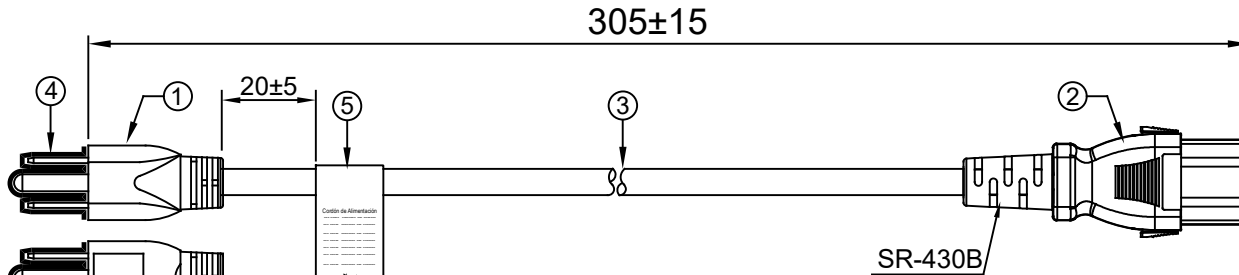


NOTES:

- The outer box must be marked with RoHS (RoHS shown on the carton)
- For online label specifics, please refer to 0096-0001-1 REV B (inline label please refer to 0096-0001-1 REV B) For outer box label specs, please refer to 0096-0001-2 REV B (label on carton please refer to 0096-0001-2 REV B)




MARKING:




NEMA 5-15P

LABEL

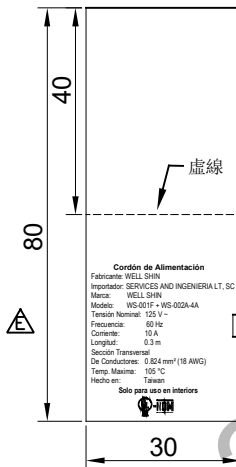


LABEL content :

Cordón de Alimentación
 Fabricante: WELL SHIN
 Importador: SERVICES AND INGENIERIA LT, SC
 Marca: WELL SHIN
 Modelo: WS-001F + WS-002A-4A
 Tensión Nominal: 125 V ~
 Frecuencia: 60 Hz
 Corriente: 10 A
 Longitud: 0.3 m
 Sección Transversal
 De Conductores: 0.824 mm² (18 AWG)
 Temp. Maxima: 105 °C
 Hecho en: Taiwan
Solo para uso en interiores



MARKING:



IEC-60320-C13
 AUTO-LOCK

⑥
5 PCS IN ONE BUNDLE

ITEM	DESCRIPTION	COLOR	Q'TY
⑥	PE ⚠	CLEAR	1
⑤	LABEL ⚠	--	1
④	PLASTIC CAP	WHITE	1
③	SVT 18AWG*3C 105°C APPROVAL : UL,CUL(CSA)	BLACK	1
②	⚠ WS-002A-4A 10 (A) 125(V) APPROVAL : UL,CUL,NOM⚠	BLACK	1
①	WS-001F 10 (A) 125(V) APPROVAL : UL,CUL,NOM⚠	BLACK	1

SIGNATURE		QUAIL ELECTRONICS, INC.® http://www.quail.com		
SAFETY ENGINEER:		PRODUCT NO.:	001F-2+002A-4A	DATE: 2021/07/02
MANAGER BY:		UNIT:	mm	SHEET: 1 OF 1
CHECKED BY:		DWG NO: 0096-4297		REV. E
DRAWN BY:				