


CUSTOMER: P/N: 3500.039AL REV. APPROVED BY:

| REVISIONS | | |
|-----------|--|------------|
| REV. | DESCRIPTION | DATE |
| △ | | 2015/03/26 |
| △ | | 2016/08/10 |
| △ | | 2019/06/20 |
| △ | | 2020/08/03 |
| △ | Change the specs of the safety wire, update the printing on the head and tail, and increase the spec label | 2022/11/16 |

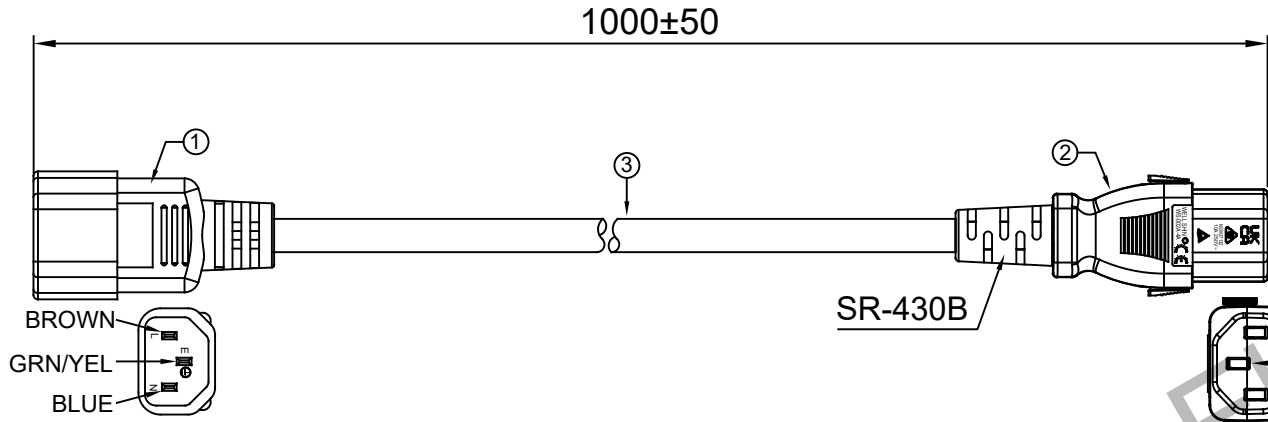

NOTES:

1. RoHS shown on the carton

MARKING:

| |
|---|
| 10A 250V~ WELL SHIN WS-003 UL US E115330 |
| NSW18151 BS EN 60320 KM 38965 |

5 PCS IN ONE BUNDLE

MARKING:

IEC-60320-C14

IEC-60320-C13
AUTO-LOCK

| ④ | PE | CLEAR | 1 | 頭 | 尾 | 線種 | 線規 | 芯線數 | 溫度 | 顏色 | 總長度 | | | |
|------|--|-------|-----|------------------|------------|--|---------------|-----|-------|-------|--------|--------------|------------------|--|
| ③ | SJTW 17AWG 3C 105°C + H05VV-F 3G 1.0MMSQ + 60227 IEC 53(RVV) 300/500 3G 1.0MMSQ APPROVAL: UL,CUL(CSA),EUROPEAN,CCC,CE | BLACK | 1 | WS-003 | WS-002A-4A | SJTW+H05VV-F+60227 IEC53(RVV) | 17AWG+1.0MMSQ | 3G | 105°C | BLACK | 1000mm | | | |
| ② | WS-002A-4A 10(A) 250(V) APPROVAL: UL,CULRCM,TUV,UKCA,CE | BLACK | 1 | SIGNATURE | | QUAIL ELECTRONICS, INC.® http://www.quail.com | | | | | | | | |
| ① | WS-003 10(A) 250(V) APPROVAL: UL, CUL,ENEC,RCM,BSI | BLACK | 1 | SAFETY ENGINEER: | | | | | | | | PRODUCT NO.: | DATE: 2022/11/16 | |
| ITEM | DESCRIPTION | COLOR | QTY | MANAGER BY: | | | | | | | | UNIT: mm | SHEET: 1 OF 1 | |
| | | | | CHECKED BY: | | DWG NO: 0096-4260 | | E | | | | | | |
| | | | | DRAWN BY: | | | | | | | | | | |